



User Manual

Model 1311 DVI+Digital Audio to HDMI Converter

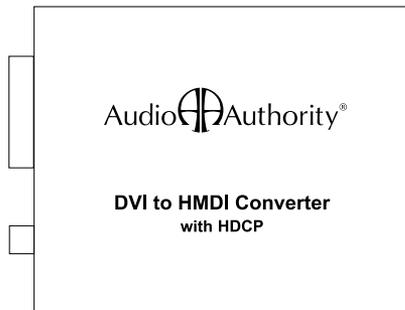

Model 1312 HDMI to DVI+Digital Audio Converter

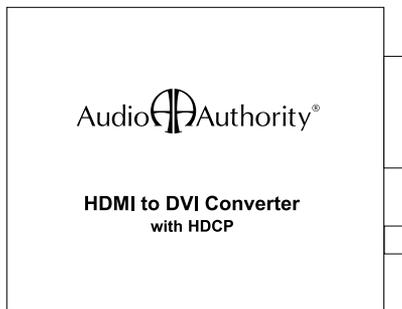

Audio Authority®

Table Of Contents

1.0	Introduction	4
2.0	Specifications	5
3.0	Checking Package Contents	6
4.0	Connecting The Hardware	6
5.0	Operating The Unit	7
6.0	Troubleshooting	8
7.0	Limited Warranty	9
8.0	Regulatory Compliance	10
9.0	Contact Information	10

1.0 INTRODUCTION

Thanks for purchasing this 1311 or 1312 AV signal converter from Audio Authority. The 1312 converts HDMI inputs to Digital DVI signals and provides an S/PDIF Audio output. The converted HDMI video signal can then be connected to an HDTV with a DVI input or to a DVI switcher's inputs. The 1311 converts a Digital DVI signal and S/PDIF Audio input to an HDMI format allowing the viewing or switching of a digital AV signal on an HDMI system. Both the 1311 and 1312 are HDCP compliant. Audio Authority also offers an extensive line of audio and video switchers, converters and distribution amps available for purchase online at www.audioauthority.com.

1.1 Liability Statement

Every effort has been made to ensure that this product is free of errors. Audio Authority cannot be held liable for the use of this hardware or any direct or indirect consequential damages arising from its use. It is the responsibility of the user of the hardware to check that it is suitable for his/her requirements and that it is installed correctly. All rights reserved. No parts of this manual may be reproduced or transmitted by any form or means electronic or mechanical, including photocopying, recording or by any information storage or retrieval system without the written consent of the publisher.

Audio Authority reserves the right to revise any of its hardware and software following its policy to modify and/or improve its products where necessary or desirable. This statement does not affect the legal rights of the user in any way.

All third party trademarks and copyrights are recognized. The Audio Authority logo and Double A logo are the registered Trademarks of Audio Authority. All other trademarks are the property of their respective holders.

1.2 FEATURES

The 1311 and 1312 have many features that enable them to perform in a superior manner. Among those features you will find:

- Supports HDCP (High-bandwidth Digital Content Protection)
- Input format Auto Detection: RGBHV or YPbPr
- S/PDIF Audio
- Supports the full 165MHz bandwidth
- Improved Video Quality via Digital interface
- Supports resolutions to WUXGA and 480i, 480p, 720p, 1080i, 1080p

2.0 SPECIFICATIONS

Signal Inputs/Output	
HDMI	Via 1x HDMI Connector
Digital RGB	Via 1x DVI-I Connector
Digital Audio	Via 1x S/PDIF Connector
Digital Signal I/O	
HDMI Compliance	HDMI 1.0
DVI Compliance	DVI Rev 1.0
Operating Frequency	
Frequency	Up to 165Mhz
Resolutions (HDTV)	
Interlaced (50&60Hz)	480i, 576i, 1080i
Progressive (50&60Hz)	480p, 576p, 720p, 1080p
Special (24 to 30Hz)	1080p@24, 1080p@25, 1080p@30
Resolutions (PC)	
VGA	60Hz, 72Hz, 75Hz, 85Hz
SVGA	60Hz, 72Hz, 75Hz, 85Hz
XGA	60Hz, 70Hz, 75Hz, 85Hz, 87Hz (XGAi)
SXGA	60Hz, 75Hz, 85Hz,
UXGA	60Hz, 1152@70Hz, 75Hz & 85Hz
Mechanical	
Size (H-W-D)	1.2" x3.0" x4.1" (30x76x105mm)
Weight (Net)	1lb (2.2kg)
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0° to +48° C (+32° to +120° F)
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70° C (+14° to +158° F)
Storage Humidity	10% to 85%, Non-condensing
Power Requirement	
External Power Supply	5VDC@2A
Regulatory Approvals	
Converter Unit	FCC, CE
Power Supply	UL, CE, CSA
Accessories Included	
AC Power Adapter	(USA)
User Manual	

3.0 CHECKING PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make certain the following items are contained in the shipping carton:



- 1311 or 1312 Audio Video Converter
- 5 VDC AC Power Adapter
- User Manual

Note: Please retain the original packing material should the need ever arise to return the unit. If you find any items are missing, contact Audio Authority immediately. Have the Model Number, Serial Number and Invoice available for reference when you call.



4.0 CONNECTING THE HARDWARE

Please study the panel drawings below and become familiar with the signal input(s), output(s) and power requirements.

Model 1311 DVI + Digital Audio to HDMI Converter

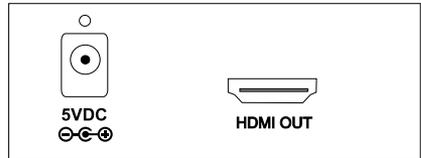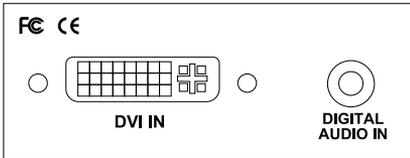

Model 1312 HDMI to DVI + Digital Audio Converter

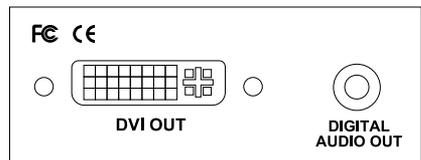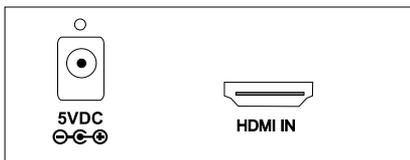

5.0 OPERATING THE UNIT

Before installation, please make sure all devices you wish to connect have been turned off.

- Connect the AC adapter to the Converter's power input (Do not plug the adapter into an AC outlet yet).
- Connect the appropriate cables to the source device and then the Converter.
- Connect the output cables to the Converter and then to the destination device.
- Plug the Power Adapter into a working AC outlet.
- Power on all input and output devices.
- The DVI-HDCP input signal should now be available to all devices connected to the device outputs. Neither converter unit has any controls that require adjustment.

6.0 TROUBLESHOOTING

If the Converter does not appear to be functioning, make certain that the source and destination device connected to the unit are functioning correctly by connecting each device using a cable with a length of 6 feet or less. (In other words, make certain that the problem is not caused by long cables.) If the signal is present under those conditions, make certain that the power is present to the converter. If it is, measure the cable length you are attempting to use between the sources to the switcher and the switcher to the monitor. The input cables should be 6 feet or less in length and the output cables must be less than 33 feet long and all cables should be premium quality. Lastly, inspect the cables and connectors for damage.

6.1 Non-HDCP Compliant Devices

If a DVI device does not appear to work, make certain that the device is HDCP compliant. A non-HDCP compliant DVI device will not work with a signal that has HDCP encoding present.

6.2 Cable Length

If you need to span a distance of greater than 6 feet to reach the converter, purchase Audio Authority's 1351 DVI Repeater which will allow you to extend a cable run up to 40 feet using premium cable.

6.3 Complex Configurations

Due to the nature of High-bandwidth Digital Content Protection, and the many types of information that must be passed along the chain of devices, complex configurations involving DVI distribution amps and switchers may not work as expected. Do not use a DVI switcher in the signal path after a distribution amp; this configuration does not work.

If the problem still persists after trying the above suggestions, contact the Audio Authority Technical Service department via email: support@audioauthority.com, or call 800-322-8346 or 859-233-4599.

7.0 LIMITED WARRANTY

Should any consumer use product from Audio Authority fail due to defects in materials or workmanship within one year from the date of the original sale to the end-user, Audio Authority guarantees that we will replace the defective product at no cost. Freight charges for the replacement unit will be paid by Audio Authority (Ground service only). A copy of the invoice showing the item number and date of purchase (proof-of-purchase) must be submitted with the defective unit to constitute a valid in-warranty claim.

Units that fail after the warranty period has expired may be returned to the factory for repair at a nominal charge, if not damaged beyond the point of repair. All freight charges for out-of-warranty returns for repair are the responsibility of the customer. Units returned for repair must have a Return Authorization Number assigned by the factory.

This is a limited warranty and is not applicable for products which, in our opinion, have been damaged, altered, abused, misused, or improperly installed. Audio Authority makes no other warranties either expressed or implied, including limitation warranties as to merchantability or fitness for a particular purpose. Additionally, there are no allowances or credits available for service work or installation performed in the field by the end user.

Warranty Service Procedures

If you suspect a product defect, contact Audio Authority's Technical Service Department at **800-322-8346** or **859-233-4599** for assistance in verifying the problem. If a defect or potential defect is suspected, a replacement unit will be shipped immediately on a defect-exchange basis and a Return Authorization Number will be issued for the return of the defective product. Replacement units are sent out at the Manufacturer's Suggested Retail Price which is debited to the Customer's Credit Card at the time of shipment. Once we receive the defective unit back at the factory, it will be evaluated under the conditions of this warranty and if found to be in-warranty, a full credit will be issued to the Customer's Credit Card. Return freight charges for the defective unit are the customer's responsibility. Please contact our Technical Service Department for complete details concerning all in and out of warranty service matters.

We appreciate your confidence in our products and services and will always strive to meet or exceed your needs.

8.0 REGULATORY COMPLIANCE

The 1311 and 1312 Converters have been tested for compliance with FCC and CE Regulations.

The Power Adaptor/Supply has been tested for compliance with UL, CSA & CE Regulations.

9.0 CONTACT INFORMATION

Should you have questions or require assistance with this product in areas not covered by this manual, please contact Audio Authority using the information below.

Audio Authority Technical Service
800-322-8346 M-F 8:30 AM to 5:00 PM, EST
International: 859-233-4599 Fax: 859-233-4510
Send email to: support@audioauthority.com

Audio Authority Corporation
2048 Mercer Road
Lexington, Kentucky 40511-1071
USA

Audio Authority and the Double-A Symbol are registered trademarks of Audio Authority Corp. Copyright April, 2006, all rights reserved.

HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

Audio  Authority[®]

2048 Mercer Road, Lexington, Kentucky 40511-1071

Phone: 859-233-4599 • Fax: 859-233-4510

Customer Toll-Free USA & Canada: 800-322-8346

Website: <http://www.audioauthority.com>