



MH3-S5



Multi-Purpose MediaHub

Media Player and Demonstrator Combined

Features

- BrightSign® Built-In (HS145)
- HDMI® output (4096x2160@60Hz)
- Discrete digital and analog audio outputs
- Customizable push-button ports (RJ9 x8)
- Communication ports for peripherals (RJ45 x3)
- USB port for touch screen applications
- Ethernet port for remote updates

We combine BrightSign's media-playing muscle with the interactivity you expect from Audio Authority® in our MH3-S5 MediaHub. With a BrightSign player built-in, the MH3-S5 produces native 4K@60 video and high fidelity audio, with all the custom behaviors* made possible by BrightAuthor software. Multiple ports on the MH3-S5 link interactive peripherals like push-buttons and serial control devices including touch screens and touch panels. To keep presentations fresh in the field, update media content and BrightAuthor programming via Ethernet, or update the SD card locally.

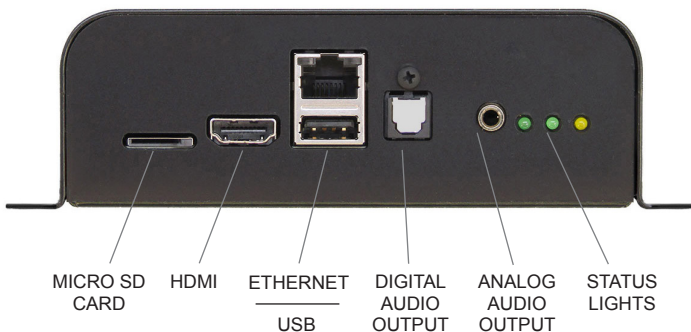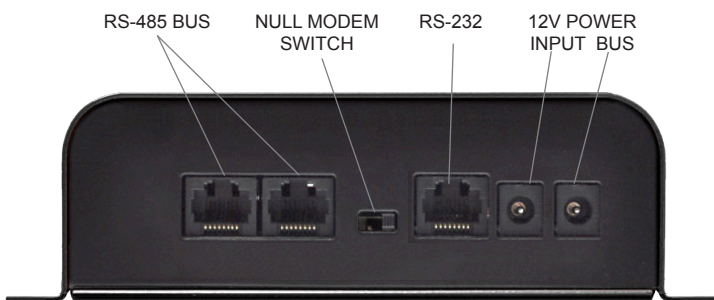

The MH3-S5 has many control options including touch screens, TouchSelect panels, and EasyPlug push-buttons.

*Additional charges may apply for custom programming and custom overlay.

Example System:

Sound Bars

The MH3-S5 does more than play media in this full-featured sound bar demo - it coordinates a complex audio demo with video and lighting effects. Customers can audition sound bars, select media, add rear speakers, compare TV speakers to sound bars, and adjust volume. Push a button on the right to hear a sound bar, which also triggers the first media file to play, and the shelf to light up. Lights under the shelf also highlight the selected subwoofer. The user selects media using a small touch screen. The rear speakers are powered via a smart amplifier that tracks volume control with the selected sound bar. After a period of inactivity, the display returns to a silent state, ready for the next customer.

BrightSign®
Built-In

The MH3-S5 contains a complete BrightSign media player, with all the proprietary features, but offers more media outputs and more connectivity to multiple external devices.



MH3-S5 Specifications

See audioauthority.com/MH3-S5 for full audio and video specifications.

- Audio Formats: MP3 (mono or stereo) @ 44.4kHz or 48kHz, WAV (mono or stereo) @ 96kHz, 48kHz, or 44.1kHz
- Recommended Video Formats: MP4 and MOV (without metadata) with AAC or AC3 audio (pass-thru)
- Video Codecs: H.265, H.264 (MPEG-4, Part 10), MPEG-2, MPEG-1
- Dimensions (HxWxD, inches): 5.4 x 5.2 x 1.8
- BrightSign® HS145 integral digital signage module
- Serial Communication: RS-485, RS-232 (Baud rate is software selected)
- Power Supply: 12V DC, 1.5A



2048 Mercer Road, Lexington, KY 40511-1071 USA
Phone: 859-233-4599 • Fax: 859-233-4510
Customer Toll-Free USA & Canada: 800-322-8346
audioauthority.com • sales@audioauthority.com