



# MH6-4K




## Multi-Audio MediaHub

## Media Player and Audio Demonstrator Combined

### FEATURES

- BrightSign® Built-In
- HDMI® output (4096x2160@60Hz)
- Digital & analog audio (dual-purpose jacks x4)
- Customizable push-button ports (RJ9 x8)
- Communication ports for peripherals (RJ45 x3)
- USB port for touchscreen applications
- Ethernet port for remote updates

We combine interactivity with audio switching and distribution in the MH6-4K MediaHub. In addition to 4K@60 video on the HDMI output, this audio-oriented MediaHub simultaneously offers digital and analog audio on each of its four audio outputs. An audio bus output can be used to add other audio components. Multiple ports on the MH6-4K link interactive peripherals like push-buttons and serial control devices including touch screens and touch panels to serve a variety of demonstration designs. To keep presentations fresh in the field, update media content and BrightAuthor programming via Ethernet.

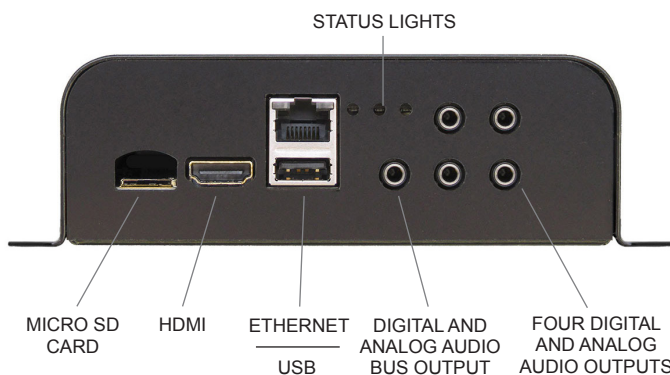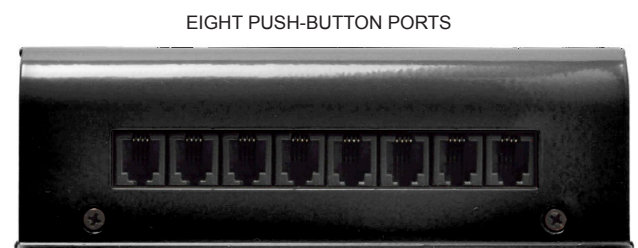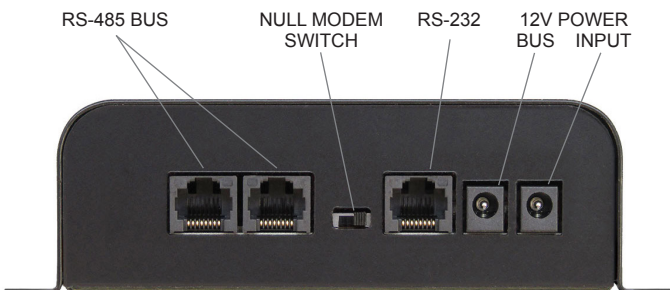

The MH6-4K has many control options including touch screens, TouchSelect panels, and EasyPlug push-buttons.

\*Additional charges may apply for custom programming and custom overlay.

## Example System:

### Smart Speakers and Sound Docks

This display uses light to attract and communicate, and leverages the MH6-4K MediaHub's multiple audio output options to demonstrate a variety of products. Each of the four audio output jacks can play both digital and analog audio, depending on the requirements of the device. The HDMI output and USB jack interface with a touch screen LCD that informs the customer about each product. The 1895 Visual Volume knob is an intuitive and inviting way to present volume control. It connects directly to an RS-485 port. Each product is visually highlighted by a lit platform, managed serially by a light controller.

**BrightSign®**  
Built-In

The MH6-4K contains a complete BrightSign media player, with all the proprietary features, but offers more media outputs and more connectivity to multiple external devices.



## MH6-4K Specifications

See [audioauthority.com/mh6-4k](http://audioauthority.com/mh6-4k) for full audio and video specifications.

- Audio Formats: MP3 (mono or stereo) @ 44.4kHz or 48kHz, WAV (mono or stereo) @ 96kHz, 48kHz, or 44.1kHz
- Recommended Video Formats: MP4 and MOV (without metadata) with AAC or AC3 audio (pass-thru)
- Video Codecs: H.265, H.264 (MPEG-4, Part 10), MPEG-2, MPEG-1
- Dimensions (HxWxD, inches): 5.4 x 5.2 x 1.8
- Serial Communication: RS-485, RS-232 (Baud rate is software selected)
- Power Supply: 12V DC, 1.5A