


## IR Converter for Bose® Lifestyle® and MRI Systems

*This one-of-a-kind converter allows a compatible learning IR remote to communicate with Bose Lifestyle systems*

The Model **C-1024A** makes it possible for multiple BOSE sound and video components to respond to the commands issued by a single Pronto® or Harmony 880 learning remote control. Small enough to be easily hidden, the C-1024 is designed for placement behind the video display in the home theater room. Only the small IR sensor remains visible near the front of the display where it receives the remote control commands. System control is achieved through a serial jack connection from the C-1024A to the rear panel of the LIFESTYLE® system. The C-1024 is compatible with the Bose music center models LIFESTYLE 20, 25 and 30 and the MRI LIFESTYLE 40 and 50.

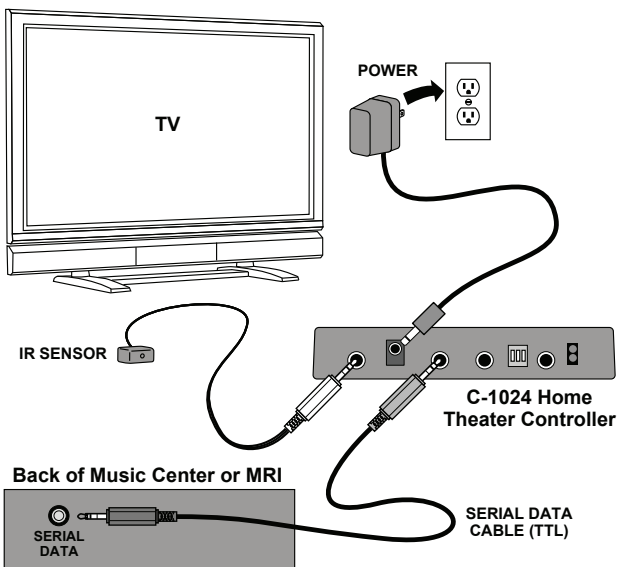

### SPECIFICATIONS:

<b>Model Number:</b>	C-1024A	<b>Size (H x W x D):</b>	2.5 x 5 x 1.1
<b>IR Input Connectors:</b>	(2) 3.5mm	<b>Warranty:</b>	One Year Replacement
<b>TTL Output Connector:</b>	3.5mm	<b>Power Requirements:</b>	12 volts DC
<b>RS-232 Output Connector:</b>	3.5mm	<b>Regulatory Approvals:</b>	FCC
<b>IR Input Pinout (shaft, ring, tip):</b>	ground, data, +5V	<b>Accessories Included:</b>	IR receiver, power supply, 3.5mm cord, Manual
<b>Data Pinout (shaft, ring, tip):</b>	ground, data out, data in		

Bose and LifeStyle are trademarks of Bose Corporation.