


Left & Right Speaker Setup:

Model 930 Speaker Modules can be configured to function as left, right or mono modules. The slider switch on the left side of the module is marked "L" and "R". Position the switch to "L" for LEFT channel function and toward "R" for RIGHT channel or MONO function. (If used for mono operation there will not be a corresponding "L" module.) Also 930 modules are unique in the fact that they share the same GROUP Address with the amplifier group with which they operate. For example, if the front amp product group number is "4", then the front speaker group number would also be "4". Finally, LEFT and RIGHT modules have the same module address. For example, speakers 1-8 both "L" & "R" modules would have the following module address: Tens= 0; Units= 0; Group= 4. For speakers 9-16, both "L" & "R" modules would have the following address: Tens= 0; Units= 1; Group= 4, etc...)

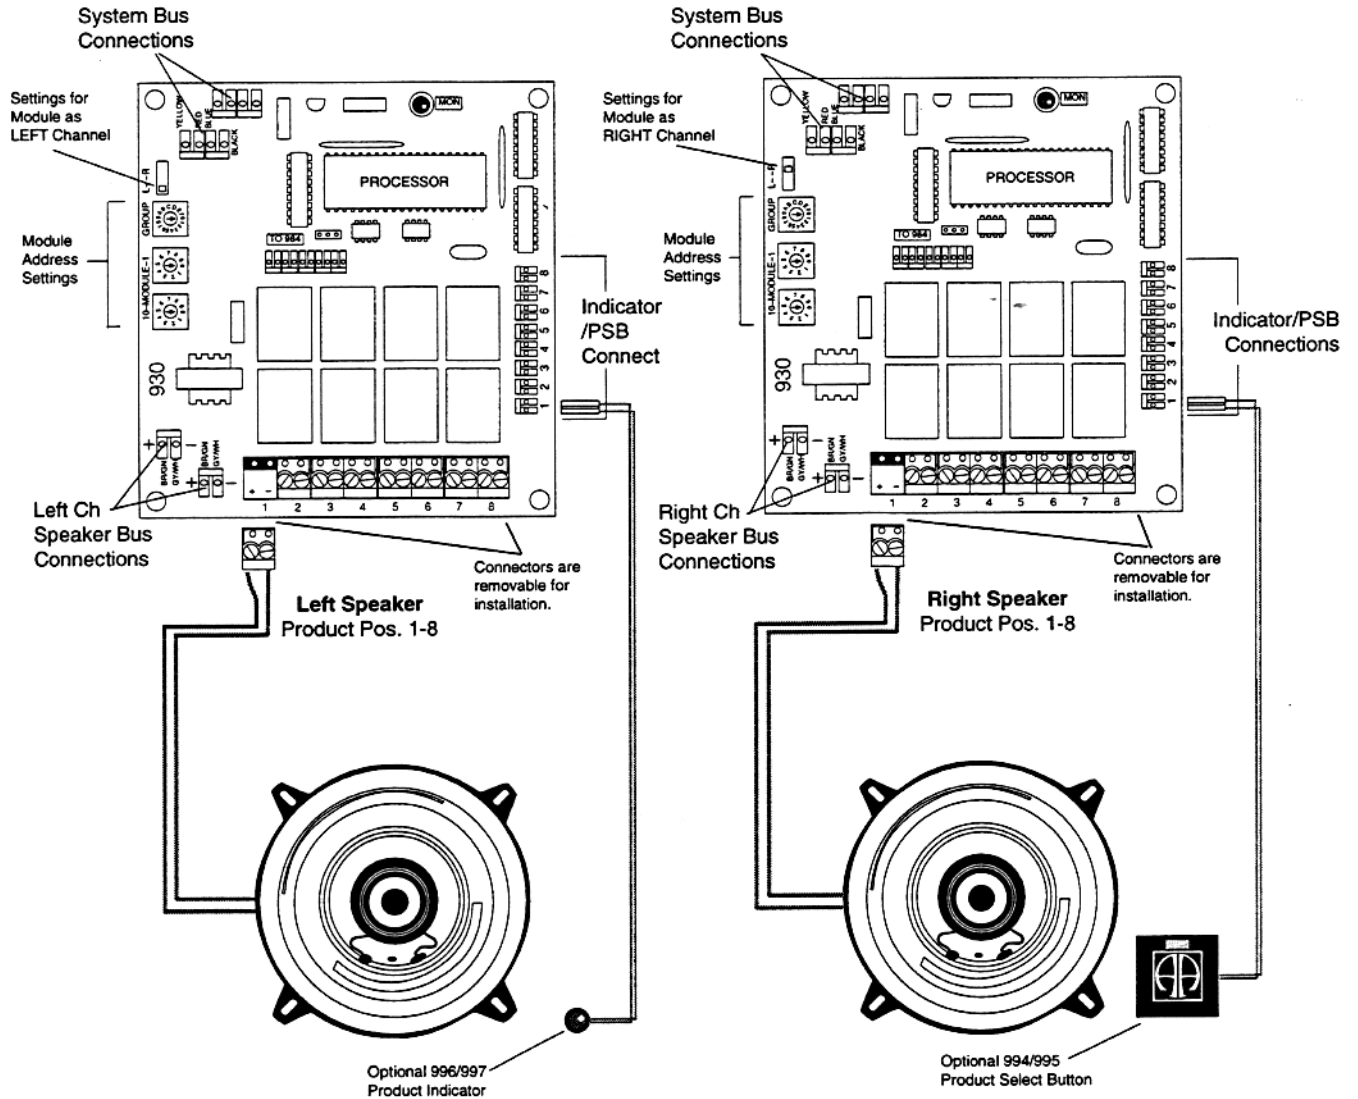

Technical Assistance: Mon-Fri 8:30 AM to 5:00 PM Eastern Time
USA & Canada Toll Free: 800/322-8346

2048 Mercer Road, Lexington, Kentucky 40511-1071
Phone: 859/233-4599 • Fax: 859/233-4510
Customer Toll-Free USA & Canada: 800/322-8346
Website: <http://www.audioauthority.com>