


Installing the Model 1799

Control PCM 2-channel digital audio via push-buttons or optional 1794 volume knob. The adjustable timeout feature keeps demos quiet when not in use.

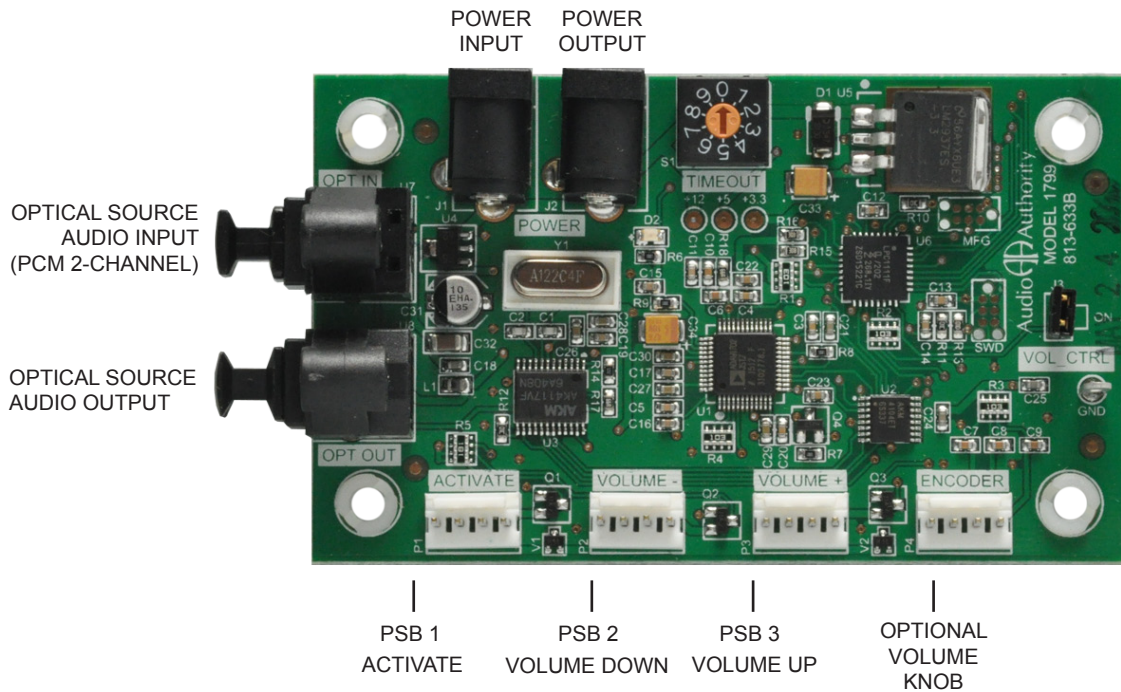

Volume Control (Push-Buttons)

To control volume using push-buttons, connect (2-wire or 4-wire) momentary switches to each position's up and down port.

Volume Knob (Optional)

To control volume using a volume knob, connect a four-conductor encoder such as Audio Authority's Model 1794 to the four-pin encoder port at each position. Push the knob to mute audio.

Digital Audio Source

Connect a PCM 2-channel source to the Optical input jack, connect the Optical Output to the soundbar.

Power

Connect included 12V power supply to Power Input. Connect a 5.5 mm jumper cable to other 1799 units if desired.

Timeout Interval

In switching mode, a demo timer is initiated each time a customer selects a product output to audition. The demonstration length is set by the timeout switch, in increments of 15 seconds. If the timeout switch is set to 0, then the demonstration does not time out.

	Timeout Interval
1	15 seconds
2	30 seconds
3	45 seconds
4	60 seconds
5	75 seconds
6	90 seconds
7	105 seconds
8	120 seconds
9	135 seconds
0	Never



2048 Mercer Road, Lexington, Kentucky 40511-1071 USA
 Phone: 859-233-4599 • Fax: 859-233-4510
 Customer Toll-Free USA & Canada: 800-322-8346
 www.audioauthority.com • support@audioauthority.com