

How to Install the Model 991 AutoSwitch™ Camcorder Stand



Patent Pending

The Model 991 AutoSwitch™ supports a camcorder on a retail display fixture, allowing the merchandise to be picked up for inspection or replaced in the stand for display. It is designed to be used with Audio Authority® switching systems such as the 2960 Camcorder Switcher. When applied in a 2960 switching system, the 991 offers two unique features: the camcorder's picture is automatically displayed on the system's television monitor when lifted from the stand, and the camcorders are electronically protected from theft.

Installation

Set the desired number of 991 AutoSwitches on the surface to which they are to be mounted, mark the mounting hole locations with a pencil and drill $\frac{1}{8}$ inch diameter holes to accept the supplied screws. Drill a $\frac{1}{2}$ to 1 inch diameter hole in the center of the mounting hole pattern of each AutoSwitch™ stand. Feed the trigger cable through the center hole and secure the 991 to the fixture with the black mounting screws.

Connect the trigger cable to a 2-pin header on an AccessEZ™ or 2900 Series switching module and connect a standard stereo patch cord for the camcorder to the A/V jacks of the same-numbered camcorder port on the module.

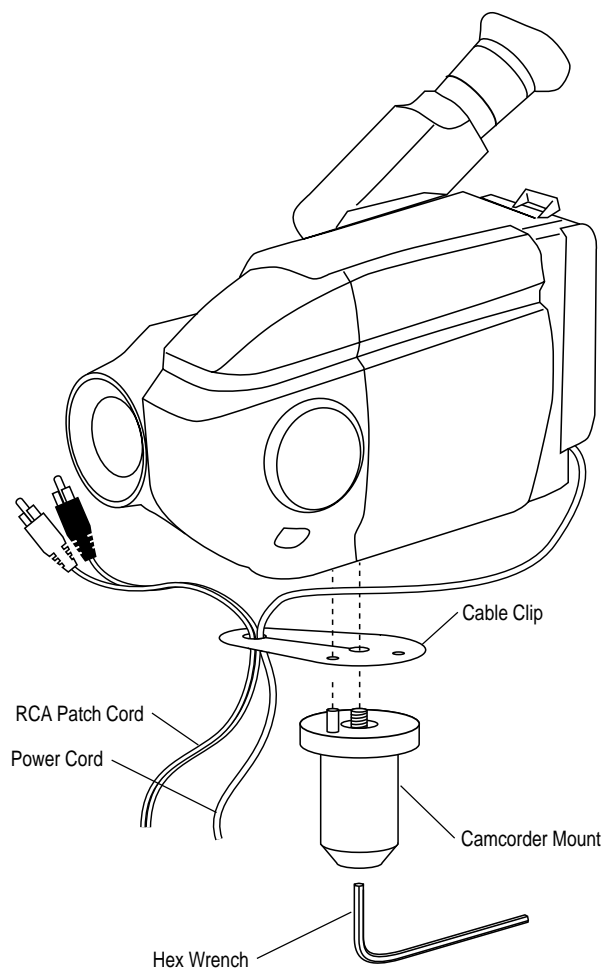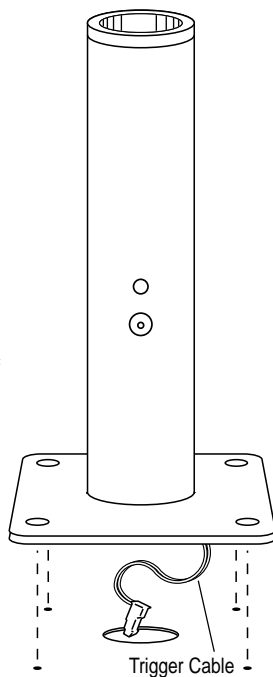

Follow the instructions furnished with the switching module regarding power supply and television monitor connections and feature switch settings.

Push the camcorder power cord and patch cord through the larger hole in the camcorder mount cable clip as shown. Secure the camcorder mount to the base of the camcorder using the hex wrench furnished, placing the cable clip between the camcorder and mount. Plug the camcorder patchcord into the output jacks of the camcorder.

If a safety tether is desired, use a length of thin steel cable between the camcorder and one of the 991 mounting screws.

The 004-012 Dual Cable Retractor offers an ideal way to keep camcorder cables out of the way, preventing cable and camcorder damage due to snags and improving the appearance of your display.



2048 Mercer Road, Lexington, Kentucky 40511-1071
Phone: 859-233-4599 • Fax: 859-233-4510
Customer Toll-Free USA & Canada: 800-322-8346
Website: <http://www.audioauthority.com>

752-265
7/00