


Installing the Model 1522 and 1525 Customer Audio/Video Stations

The Model 1522 is a complete audio and video customer unit, which can be installed in any drive up or point of sale location. It can be mounted from either side or from the back. The Model 1525 is a complete audio and video customer unit with an integrated armored cable handset. It can be mounted from the left side or from the back.

Installation

1. Decide which surface will be used to mount the AV Customer Station. Using the included template, carefully remove the knockouts with a hammer and screwdriver; dress the holes with a utility knife if necessary.
2. Run the power supply cable and the Cat 5 cable from the Hub or Counter Station through the hole made in Step 1.
3. Connect the Cat 5 cable to the HUB jack located in the lower right hand corner of the circuit board at the back of the unit. Connect the power supply cable to the DC POWER jack located on the small circuit board under the fan.
4. Connect the power supply into a source of 100-260 volts AC.
5. Secure the unit to the mounting surface using the screws provided.

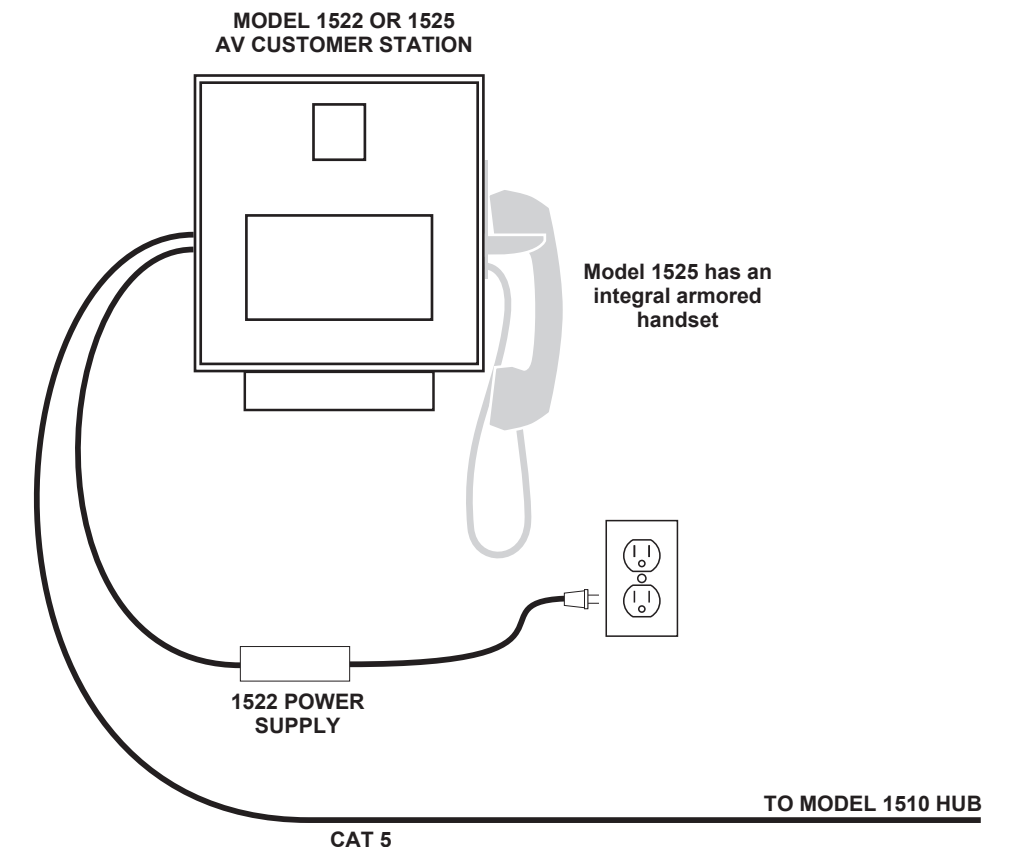

Troubleshooting

If any problem should arise that is not discussed in these instructions, call the Audio Authority Technical Service Department at 800-322-8346, M - F, 8:30 AM to 5:00 PM, EST.

Audio Authority®

2048 Mercer Road, Lexington, Kentucky 40511-1071
Phone: 859-233-4599 • Fax: 859-233-4510
Customer Toll-Free USA & Canada: 800-322-8346
Website: <http://www.audioauthority.com>

752-500
9/06

