


# Processor/EQ: 2 Channel Low-Level Input / 6 Channel Low-Level Output

The same layout applies to 6 and 4-channel processor Product Groups (a 2-channel processor group may use a 922 for input signal and a 920X for output). The Low-Level Bus connections should be routed to the corresponding bus connections on the next module in the Product Group or the Model 980 System Module (front output bus to position "A" on the 980A, rear bus to position "B" & Sub bus to position "C"). See Model 980 Setup Diagram for the next installation step.

If your system includes head units with both low-level and high-level signal output, special wiring is required for setting up the proper installation of Low-Level Bypass (see pp. 12, 42).

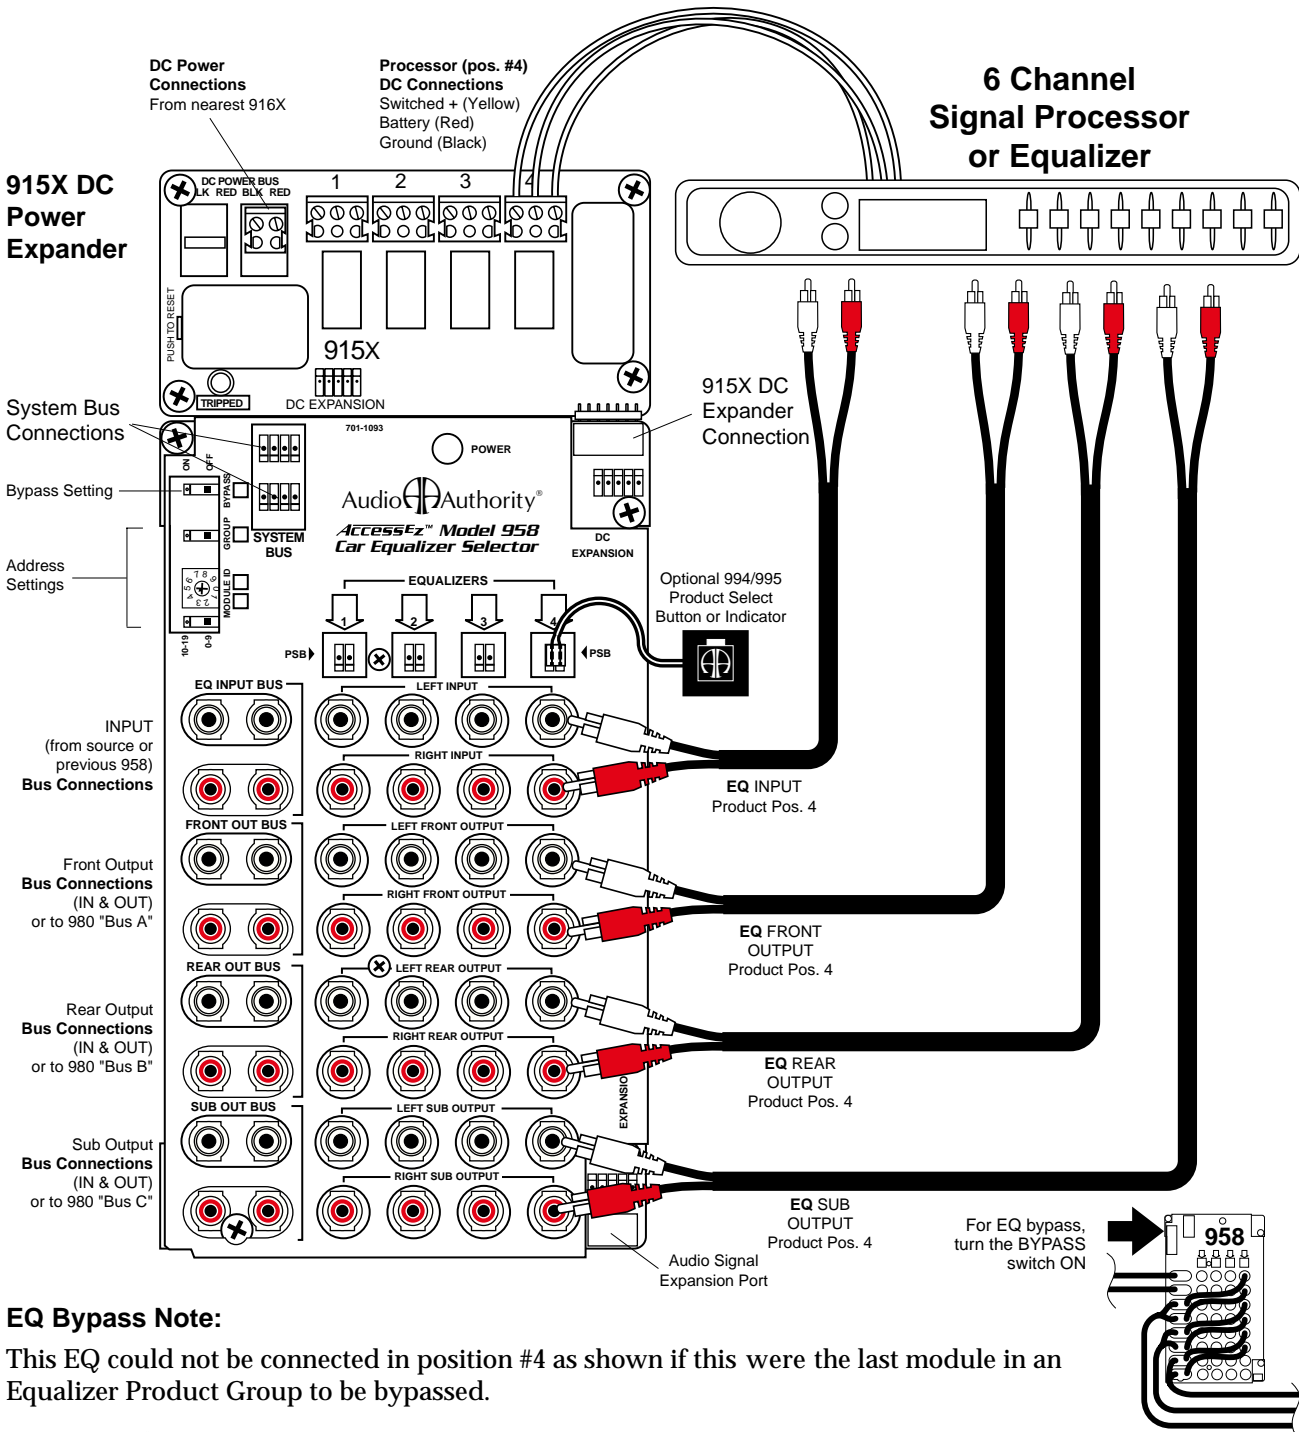

## EQ Bypass Note:

This EQ could not be connected in position #4 as shown if this were the last module in an Equalizer Product Group to be bypassed.