



1527AVB and 1529AVB

Integrated Customer Stations

Video Solutions for Drive-up Communications

Audio Authority® Customer Stations provide excellent two-way communications for drive-up lanes. Lane Station electronics are integrated into each unit, along with a high brightness, low power LCD display, and a Wide Dynamic Range camera. Inbound and outbound audio and video signals, camera tilt control, and call button signals are transmitted via one Cat 5 cable. Use the Model 1594 mounting arm to position the station at any angle. A thermostat controlled heater extends operational temperature range: -31F to 131F (-35C to 55C).


Features:

- 10.4", and 15" displays available (1527AVB & 1529AVB)
- Mic, speaker, call button, camera, and display in a weather-resistant housing
- Self-contained AV Customer Station does not require a 1520 Lane Station
- Tough, black powdercoated steel housing can be mounted from the side or back to any surface
- Designed for easy installation using Cat 5 cable



Example System:

In a 1 on 1 system, the Counter Station connects to the Customer Station via one Cat 5 cable.

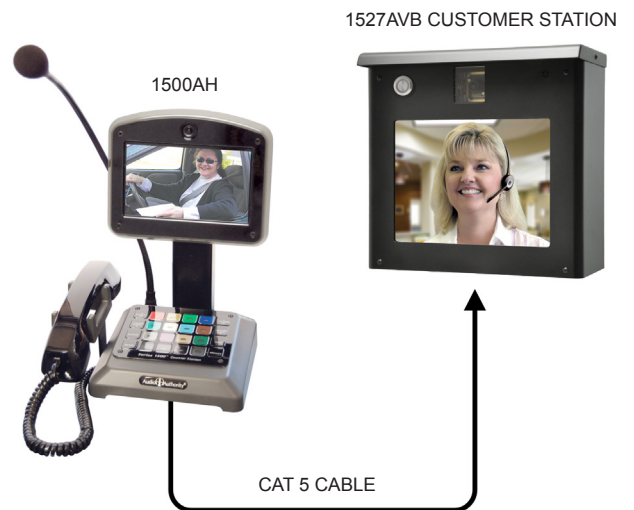

SPECIFICATIONS

1527AVB	
Screen size	10.4" diagonal
H x W x D	11.25 in x 11.5 in x 5.5 in
Weight	11.5 lbs
Power 12V DC 5A	805-036

1529AVB	
Screen size	15" diagonal
H x W x D	14.1 in x 15 in x 5.5 in
Weight	21 lbs
Power 12V DC 5A	805-036