


## Model 1177 Hookup Instructions

Connect any 4 sources' digital audio outputs to the 1177 coaxial (RCA) or optical (TosLink™) inputs. Since the 1177 "autoselects" the source from which it senses any digital audio signal, connect the sources in accordance with your preference of priority for the autoselect feature. Many source components transmit a carrier signal even when the play button is not on. So if one source, such as a DSS Tuner, is always on, other sources should have higher priority. Connect the lowest priority source to position #4 and the highest priority to position #1. Now connect the 1177 output to your digital receiver (either coax or optical). Apply AC power to the 1177 and other components, and test the system. Turn on one source at a time and observe the desired automatic switching behavior. If you prefer to keep all components on, you can use the manual select button to switch between sources. Interpret the LEDs as follows: Green = Signal present; Red = Selected; Flash = Selected, No signal.

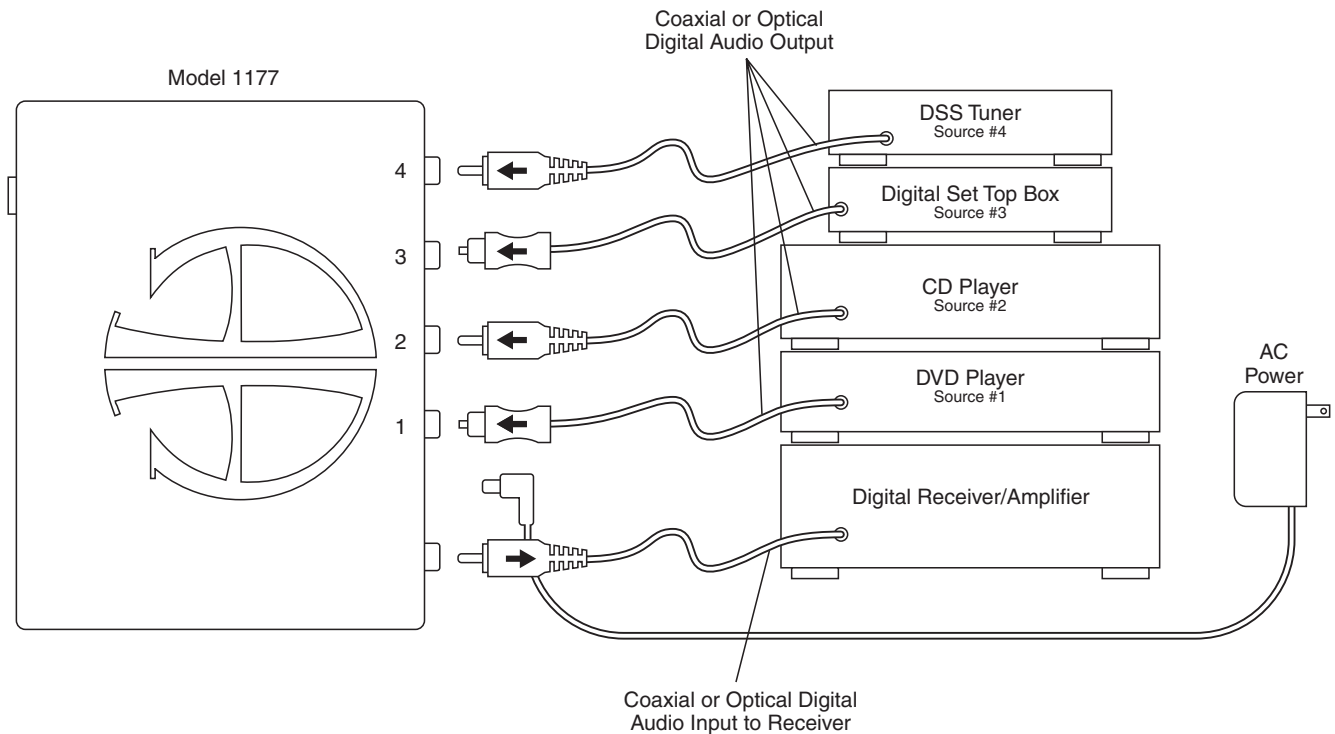

2048 Mercer Road, Lexington, Kentucky 40511-1071  
Phone: 859-233-4599 • Fax: 859-233-4510  
Customer Toll-Free USA & Canada: 800-322-8346  
Website: <http://www.audioauthority.com>

752-346  
4/01