



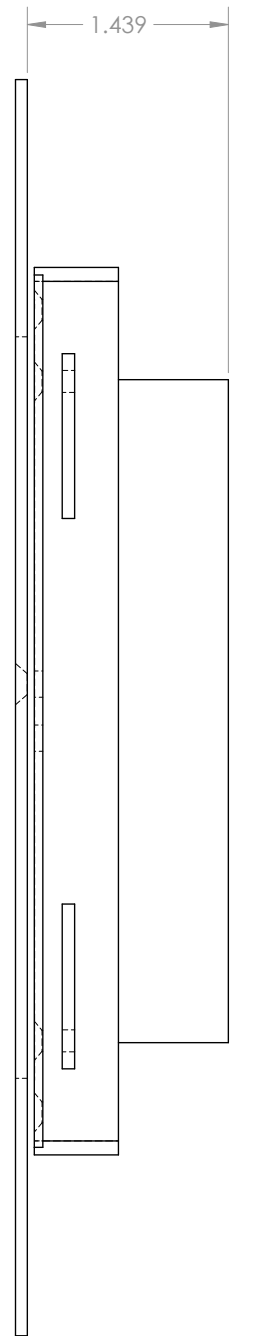

How to Mount the 903i-A

Use the cutting template to cut a hole in the surface, and drill six 1/8" (3mm) holes indicated for mounting screws. Mount the display by the side brackets in the four upper and lower holes. Mount the bezel over the display using the two middle screws. *Note: the bezel mounting holes are above the vertical center line.*

See page 2 for full-size template

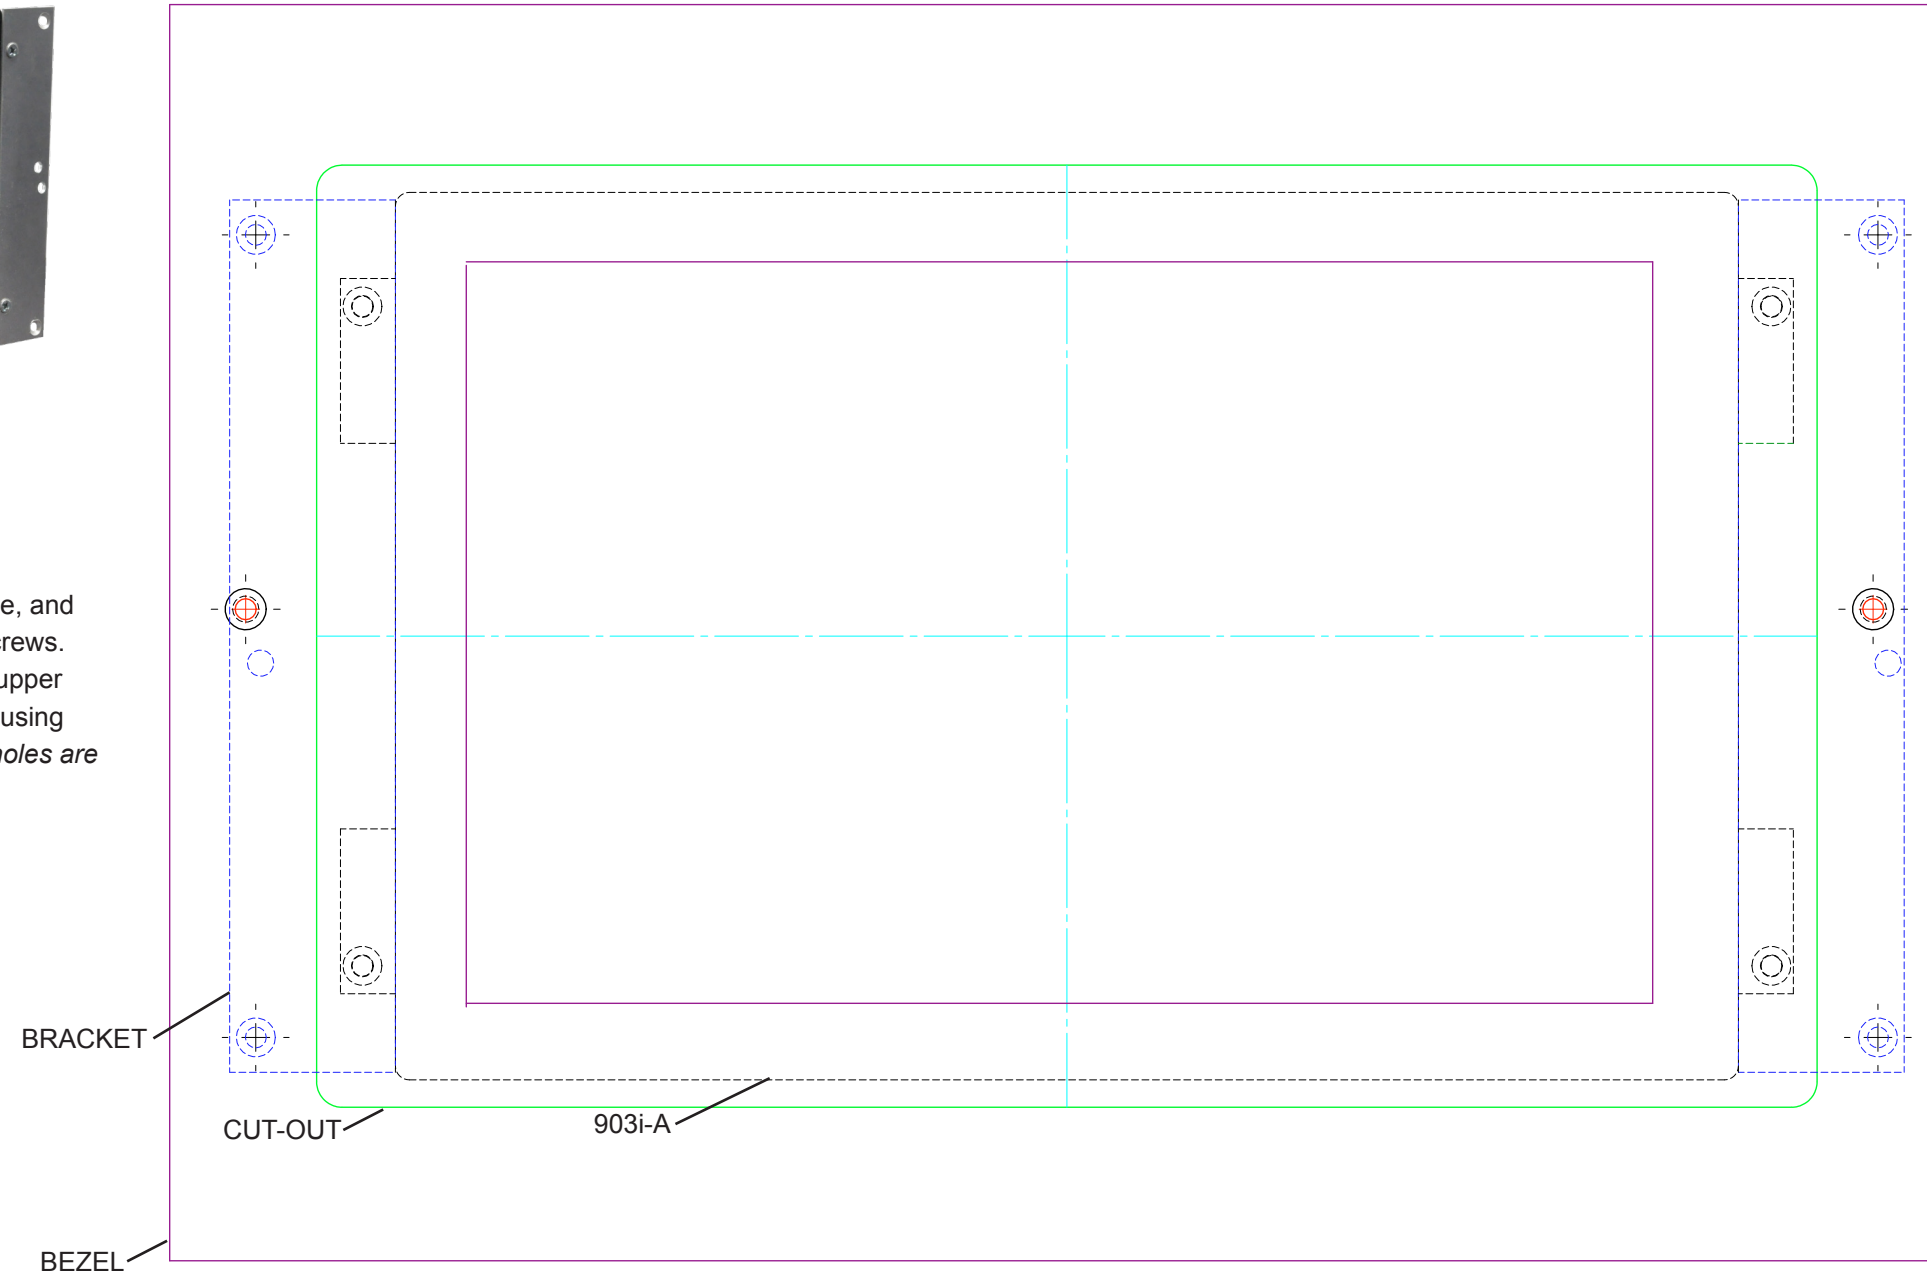

903i-A (SIDE VIEW)



903i-A PORTS (BOTTOM REAR)

