

978WM Wall Mounting Kit


This kit allows the Model 978 Power Supply to be hung from a vertical surface in display applications, either where it has access to room air for cooling, or where cooling air must be drawn into an enclosed fixture.

In Room Air

Attach the wall bracket to any of three edges of the bottom cover of the 978 as shown in the illustration below. Choose the edge that orients the power supply in the best direction for your application. Remove two of the large rubber feet only if they interfere with the bracket. Use #6 screws and plastic spacers (supplied) to secure the bracket to the 978. Hang the 978 with two #8 screws (supplied) in wood surfaces or with metal anchors (not supplied) in wallboard.

In Enclosed Fixtures

To allow the 978 to draw cooling air from outside a fixture, attach the wall bracket to the bottom of the 978 using #6 screws and plastic spacers. Remove all 4 of the large rubber feet. Drill and cut out an outside wall of the display fixture using the enclosed template and secure the 978 to the fixture with two #8 screws. Provide an air outlet at the top of the fixture.

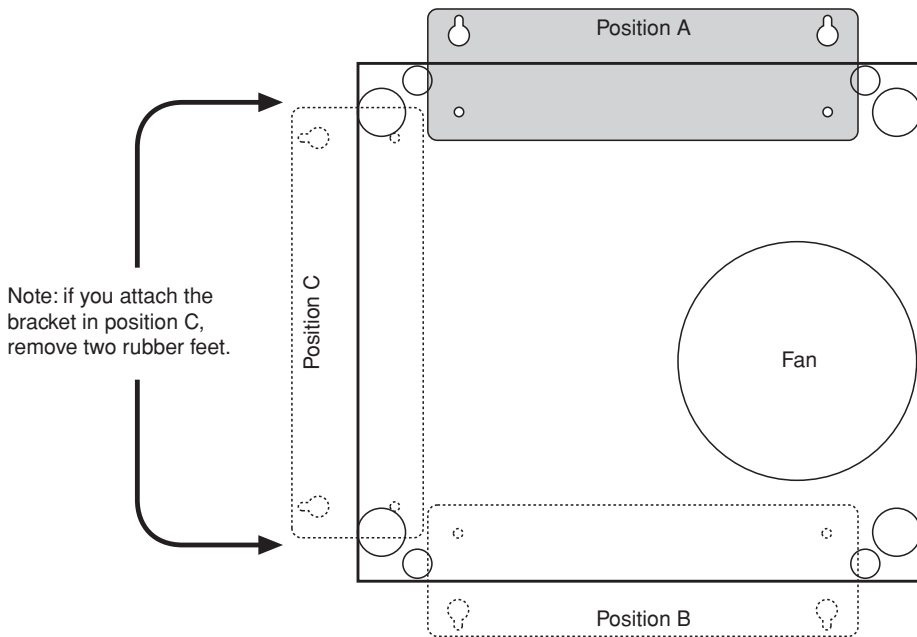

2048 Mercer Road, Lexington, Kentucky 40511-1071
Phone: 859/233-4599 • Fax: 859/233-4510
Customer Toll-Free USA & Canada: 800/322-8346
Website: <http://www.audioauthority.com>

752-421
3/02