

User Manual

1542V Wireless Headset



Audio  Authority®

Introduction

The Model 1542V Wireless Headset for Series 1500 and 1580 Intercom Systems allows freedom of movement for users from the intercom Counter Station for maximum efficiency while serving drive-up lanes. Each base station can sync with up to four headsets, and multiple headsets can operate in close proximity. Easy to use call-control buttons make it easy to manage multiple lanes.


Features



- Sync up to four headsets with each base station
- Operate multiple headsets in the same room
- Extended talk time (Headset should be turned off when not in use to conserve battery power.)
- Advanced hearing protection
- Noise-cancelling microphone
- Dedicated button to answer/end calls
- Separate buttons to mute call or adjust volume
- LED display with Battery, Mute, and Audio link indicators
- Easy installation

Checking Package Contents

Before attempting to use this device, please check the packaging and make certain the following items are contained in the shipping carton:


- Headset
- Base
- 801-142 cable
- Power Adapter
- User Manual

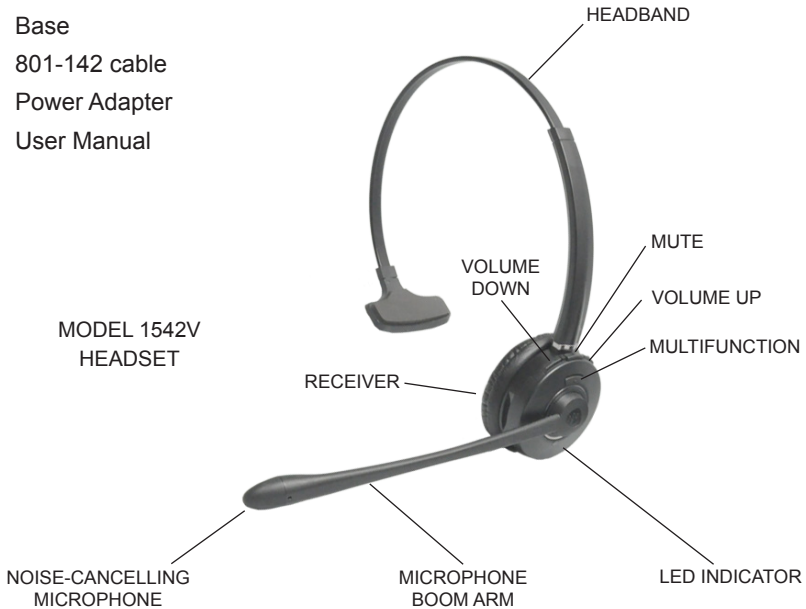

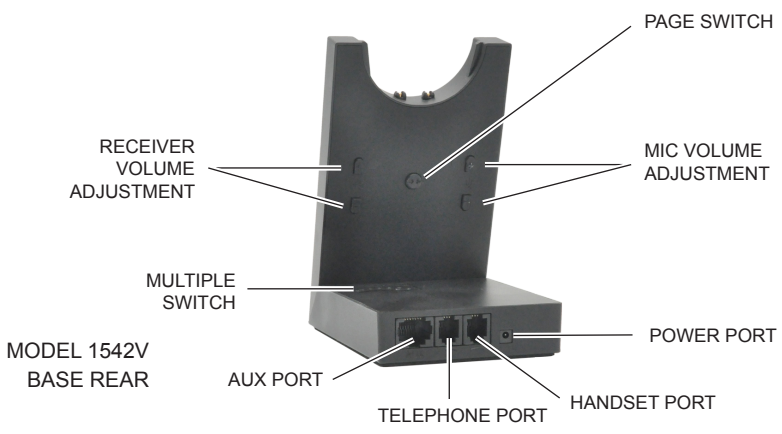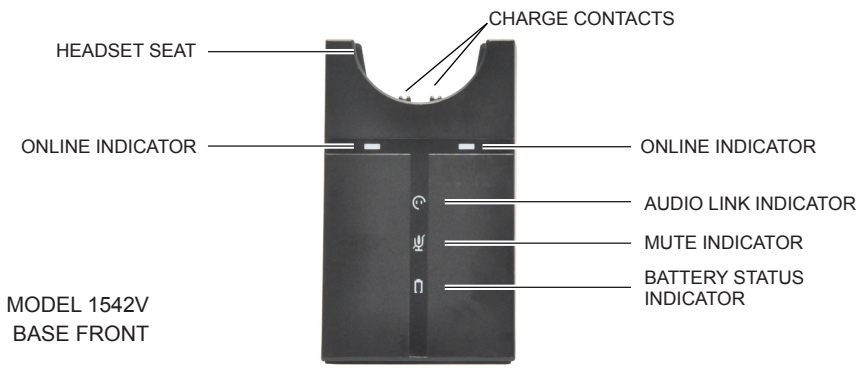

Connecting the 1542V

The 1542V headset base connects to the Audio Authority 1500A via 801-142 RJ11 to 2.5mm cable.

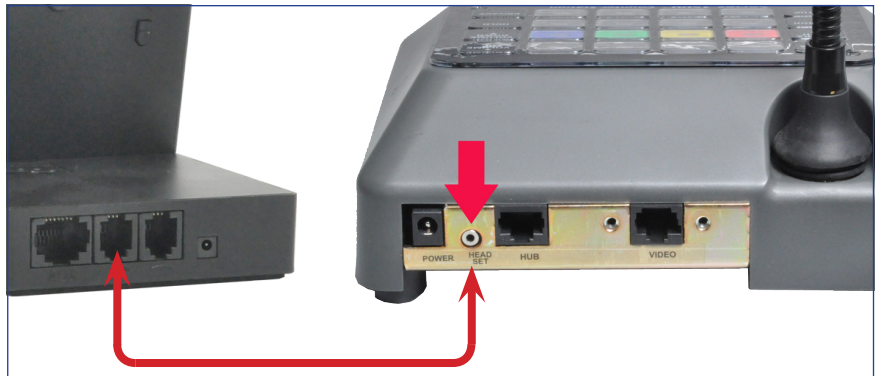

- 1) Connect the RJ11 end of the 801-142 cable into the port marked telephone on the 1542V base unit and plug the 2.5mm end into the port marked headset on the 1500A.
- 2) Connect power supply to AC power, then to the 1542V power port.
- 3) Power on the headset by pressing the multifunction button for 2 seconds. The blue LED on the headset flashes every three seconds indicating it is on. Press the multifunction button (or dock the headset and remove) to link to the base unit. The audio link indicator on the base is lit to verify connection.
- 4) Charge the headset by docking to the 1542V base unit. The battery status indicator flashes green while charging and lit solid green when complete. A battery status indicator lit yellow indicates a medium charge, red indicates a low battery.

Operation

Pairing the Headset - Press and hold the page switch on the rear of the base for five seconds to search for the headset. Press the headset's mute button until the headset's flashing LED is lit solid indicating a successful pairing.

To Unpair a Headset - Unplug power from the base power port. Press and hold the + Mic adjustment button while plugging power back into the base. The battery charging status indicator flashes three times signaling a successful unpairing. The base unit automatically enters search mode and the audio link indicator is lit.

Pairing Additional Headsets - Press and hold the page switch on the rear of the base for five seconds to search for additional headsets. Press the headset's mute button until the headset's flashing LED is lit solid indicating a successful pairing.

Answering a Call - Activate the headset, touch PRIVACY on the 1500A keypad and select the flashing lane. If the headset is the preferred method, leave PRIVACY on.

Extending Talk Time - Headset should be turned off when not in use to conserve battery power. Press the Multifunction button once to turn it off, press it again to turn it back on.

Putting a Call on HOLD - Touch HOLD on the 1500A keypad.

Picking Up a Call from HOLD - If PRIVACY is already on, activate the headset and select the blinking lane key.

