


Using Kit 43 For AM/FM Signal Distribution

The Model KIT43 supplies an AM/FM antenna signal to four car radios when used with a Model 975A AM/FM antenna amplifier. Up to four Kit 43s may be cascaded for a total capacity of 16 radios.

Install the 975A as directed in its instructions. Connect its output to the IN port of the 4-way tapoff supplied in this kit. Leave the termination in place on the OUT port, unless you are expanding capacity beyond 4 radios. In that case, remove the termination and connect the OUT port to the IN port of the next tapoff. Up to 4 tapoffs may be connected in this way, but the last one must have a termination on its OUT port.

Use the supplied Motorola cables to feed each radio from a tapoff port.

If your display includes RF CD changers, you can feed their outputs to the 975A and play them through the radios. See the 975A instructions for details.

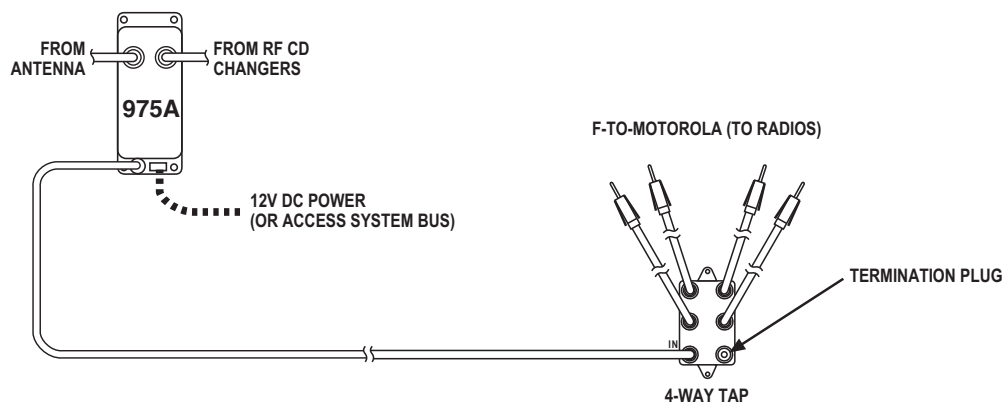

2048 Mercer Road, Lexington, Kentucky 40511-1071
Phone: 859/233-4599 • Fax: 859/233-4510
Customer Toll-Free USA & Canada: 800/322-8346
Website: <http://www.audioauthority.com>

752-426
4/02